



TEMPSTICK® Radio System



Wireless Temperature Data Logger

The **TempStick® Radio** wireless sensor is a temperature radio recorder that can be used in combination with different systems and software. It acquires the temperature values through its sensor, available also with cable, and send the data to a radio receiver that can communicate with the PC directly with the USB port or through a network with an Ethernet connection. It works also with the **Radio Printer**, the portable device with printer that work without software and PC.

Pro:

- radio transmission, no more cables and real time control of the data;
- compact and accurate;
- can be used in multiple system for many applications;
- available also with sensor and external cable, all food grade.

Applications:

- stock houses and warehouses
- laboratories
- fridges/freezers
- transports
- other temperature sensitive environments compliant with ISO 9001 standards.

Sensors are waterproof, as the cables.

All units can be calibrated and delivered with their calibration certificate, necessary for ISO 9001 compliance.

Standard calibration validity is of one year.



Transmission:

- reliable, with data control;
- no possibility of wrong data;
- range up to 200 meters in open space, 80 meters in closed environment (transmission range depends also on walls and material of the walls themselves. Iron and steel obstacles might reduce the transmission range).

Sensors and transmitter:

- each transmitter has its unique identification number, as the radio;
- sensors are easy to install and place where you need to control temperature;
- software can manage a big number of sensors and transmitters;
- possibility to have the configuration kit (to set rate of transmission).

Technical Features



TempStick® Radio	
Size	6,5 X 5 X 4,5 cm
Electronics Temperature Range	-20 °C ÷ +60 °C
Sensor Temperature Range	-40 °C ÷ +90 °C *
Resolution	0,03 °C
Accuracy	±0,25 °C with calibration certificate Standard calibration certificate: -10°C, 0°C, 10°C, 25°C, 50°C (other temperatures available on demand) ±1 °C without calibration certificate **
N° acquisitions	Acquisitions storage on PC Hard Drive
Acquisition interval	From 1 reading every 3 seconds to 1 reading every 255 minutes
Battery	Factory replaceable
Autonomy	More than 500.000 acquisitions/transmissions - more than 10 years with standard use (24 acquisitions per day)
Mission length	Depending on the Hard Drive free memory
Protection degree	IP68 probe; IP67 case; IP40 connectors


* Depends on cable and sensor. Effective range is within calibration points interval and is 100°C for maximum resolution

*** post production data without calibration

The Systems


The **TempStick Radio** works with the following systems and software:

TSR

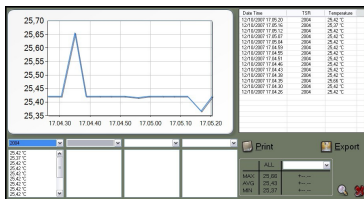

TSR with USB Radio Receiver (basics system)	
Operating systems	Windows 2000, XP, Vista
Data management	Database organized on sensor's serial number and start date of the mission
Data display	Graph (with zoom) and table (exportable in Excel) and data printing in reports
Multi-graph	Up to 4 graph can be displayed simultaneously
Alarms	Visual and sound alarms on set thresholds
Communication	USB for the Radio Receiver
Languages	English, Italian

FridgeLog with WTMC

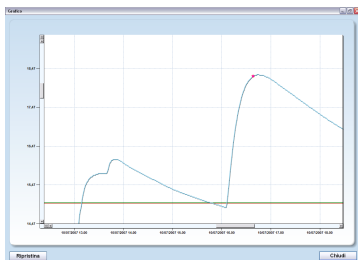

Radio Printer



Tecnosoft s.r.l.
Via delle Regioni, 34 - 20090 Segrate (Milano) - phone +39 02 26922888 - fax +39 02 26922875
e-mail: info@tecnoSoft.net - web: www.tecnoSoft.net

UNI EN ISO 9001:2000 certified for Firmware and Software development